

BALTOGRAPH TSD320/0




Max high voltage:	320 kV
Nominal power:	1500 / 4200
Focal spot size (EN12543):	3 - 5,5
Beam angle:	40°
Target angle:	20°
Inherent Filtration (mm):	≤ 4 Be
Anode cooling type:	Oil
Cooling flow rate:	14l/min
Leakage:	5mSv/h@1m
Max current:	15 / 30 mA
Weight :	≤ 41 kg
Tubehead:	Metal Ceramic

The TSD320/0 is the first tube of the Bipolar range. This tube has a big amount of power available and is designed for medium to heavy walled steel thicknesses applications. Driven by the adequate generator it can also be used in light alloys and composites materials. With a power of up to 4 kW on the large filament this tube helps you reducing your film exposures durations or achieve superior thicknesses in reduced times. The second filament will provide an alternative for higher definition radiographies or radiosopic applications.

The tube shielding is internal and reduces the radiation leakage to less than 1 R/h @ 1 m as required by International standards. In and out fluid inlets are mounted with universal connectors while the two HV plug cones are R24.

This tube can be used with all brands of generators provided that the load curve can be adapted. See our specialists if you intend to connect this tube to another unit than a BALTEAU.

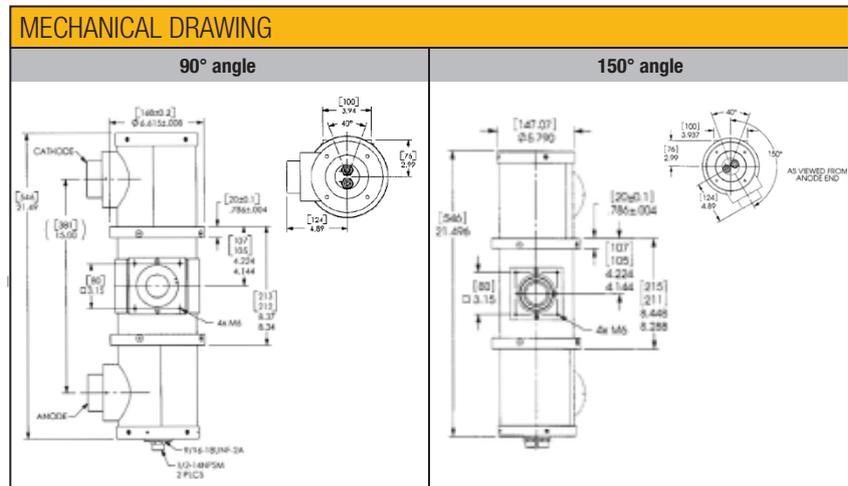


Specifications

Max. High voltage	kV	320	Nominal power	W	1500/4200
Tube type		Metal Ceramic	Inherent filtration	mm	≤ 4 Be
Beam angle		40°	Target angle		20°
Cooling mode		Oil	Leakage *	mSv/h @1m	5
HV Connector		R24	Cooling flow rate	l/min	14
Part number		04841150	Weight	Kg	≤ 41


Small Focal			Large Focal		
Max. Current @ kV Max.	mA	4,5	Max. Current @ kV Max.	mA	13
Focal spot EN12543	d	3	Focal spot EN12543	d	5,5
Max. Current	mA	15	Max. Current	mA	30

* Leakage radiation max at 1m in mSv/h at nominal kV

Load curves

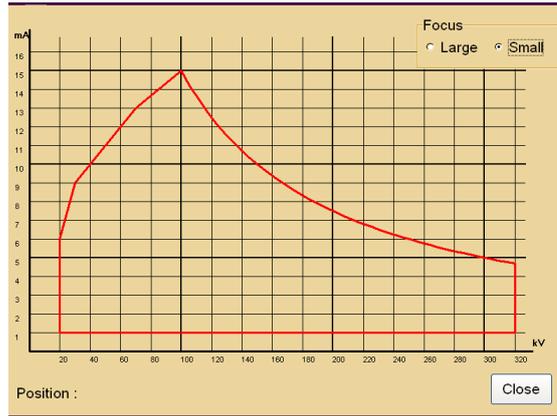

SMALL FOCAL

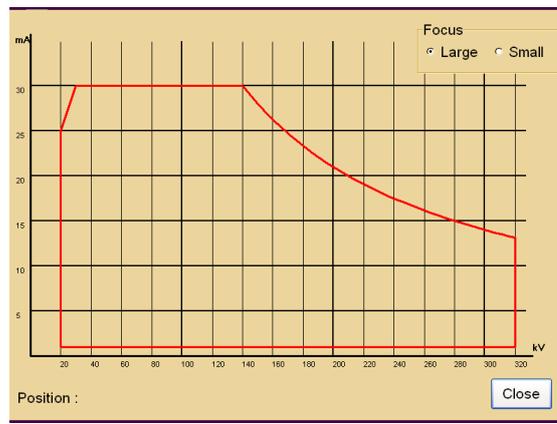

LARGE FOCAL

Load curves are indicative as they display the theoretical capacity of the target that may be modified by the HV generator connected and/or by user's settings. Please consult our engineers for up to date information and data related to your generator.

STANDARD EQUIPMENT

Part designation

- Oil hose connector 1/2"
- Oil quick connector

OPTIONAL ACCESSORIES

Part designation

- Quick flanges with key
- Tube Accessories Support
- Lead shutter
- Universal Trolley Stand
- Tube collimator



Russell Fraser Sales Pty Ltd

Unit 7/38 Waratah St
Kirrawee NSW 2232

Ph: (02) 9545 4433
Fax: (02) 9545 4218

Email: rfs@rfsales.com.au
Web: www.rfsales.com.au

ABN: 79 074 258 549