

MEETS STANDARDS FOR



EN ISO:3059

SPECTROLINE®
NDT

OPTI-LUX™ 365 SERIES

LED UV-A Inspection Lamps

OLX-365 SERIES

Spot fluorescent indications in the smallest of spaces.



Rechargeable
Battery



Bright &
Uniform Beams



Instant-On
Operation



Small Space
Inspection

**CONVENIENT
ON/OFF SWITCH**
For easy one-handed
operation

**ULTRA
VIOLET
LED**

**ANODIZED ALUMINUM
LAMP BODY**

Minimizes corrosion and stands
up to years of heavy use



**CERTIFICATE OF
LIGHT OUTPUT**
included with lamp

**4 AVAILABLE IN
MODELS:**

High-Intensity & Standard-Intensity
both with and/or without UV-A pass filters

OPTI-LUX™ 365 OLX-365 SERIES

MODEL	HIGH INTENSITY	STANDARD INTENSITY	CLEAR FILTER	INTERNAL BACK LIGHT FILTER	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 µW/cm²
OLX-365	●		●		10,000 µW/cm²	0.8 foot-candles (8.6 lux)	2 in (5 cm)
OLX-365B	●			●	10,000 µW/cm²	0.4 foot-candles (4.3 lux)	2 in (5 cm)
OLX-365FL		●	●		4,500 µW/cm²	0.3 foot-candles (3.2 lux)	2.5 in (6.3 cm)
OLX-365BFL		●		●	4,500 µW/cm²	0.2 foot-candles (2.1 lux)	2.5 in (6.3 cm)

Light Source: UV-A LED
Lamp Style: Cordless flashlight
Lamp Head Diameter: 1.25 in (3.2 cm)
Length: 5.9 in (15 cm)
Power Requirements: One 3.7V 2200mA/Hr lithium-ion battery (rechargeable)
Weight (w/Battery): 4.6 oz (130 g)
Run Time: 4 hours (continuous)
Charge Time: 4 hours (one or two batteries)
Charging Cradle: Two-battery capability with AC and DC cord sets*


① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.

*(Also available in 100-120V, 230V & 240V versions)






OPTI-LUX™ 365 SERIES FLASHLIGHT KITS
 Come complete with OPX-365 LED UV-A (365 nm) lamp with lanyard, two rechargeable batteries, smart charging cradle with AC and DC cord sets, UV-absorbing spectacles, belt holder and a hard carrying case.

HIGH-INTENSITY UV-A Beam Profile

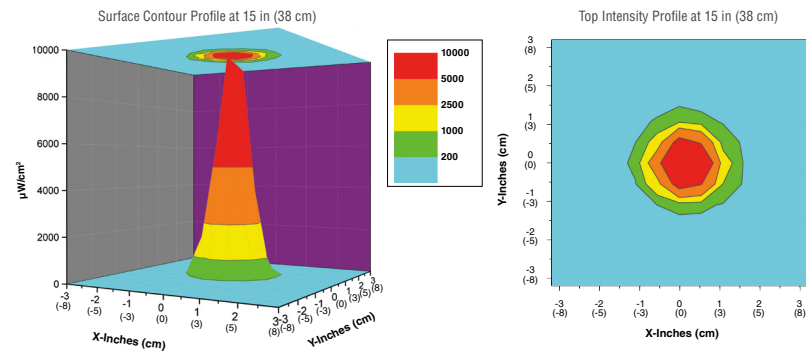

STANDARD-INTENSITY UV-A Beam Profile

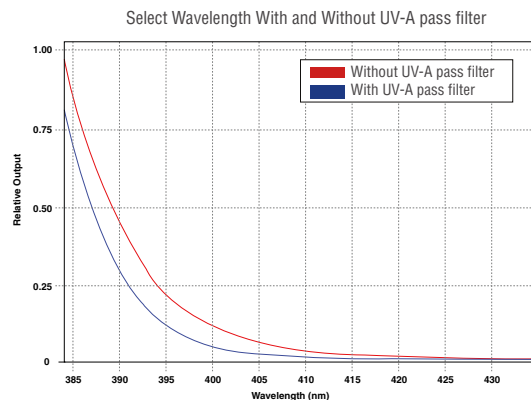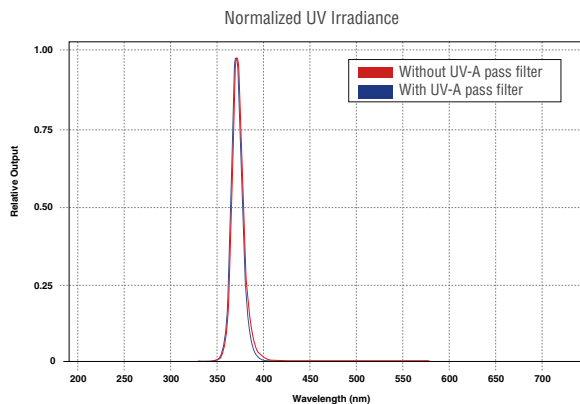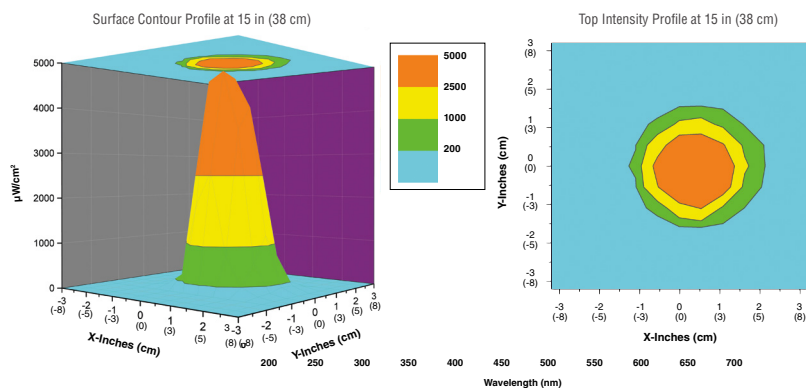

SPECTRO-UV
www.Spectro-UV.com
 4 Dubon Ct., Farmingdale, NY 11735
 866-230-7305

DISTRIBUTED BY:



Russell Fraser Sales Pty Ltd

Unit 10 / 1-11 Burns Road, Heathcote NSW 2233 Australia
 Ph: +61 2 9545 4433 Email: rfs@rfsales.com.au Website: rfsales.com.au

NDT
 6/22 A18021-4
 PRINTED IN USA