



Cygnus ROV Mountable

Available in 2,000 & 4,000 msw - Pressure Rated Models

MULTIPLE ECHO ULTRASONIC DIGITAL THICKNESS GAUGE

Measures metal thickness to determine wastage or corrosion accurately, quickly and without removing protective coatings



Features for ROV Mountable Gauge

- Available in two models: M5-ROV-2K 2,000 m (6,526 ft) depth rated and M5-ROV-4K 4,000 m (13,123 ft) depth rated.
- The Cygnus Top Side Repeater (TSR) is available as an option and has the facility to display the thickness measurements remotely and overlay them on to a video signal. This allows the measurements to be superimposed on the ROV camera's monitor screen.
- Selectable Deep Coat mode for measuring through coatings up to 20 mm (3/4") thick.
- Supplied with CygLink software to display and log thickness measurements from the ROV on a computer at the surface which can be saved to a file and printed out.
- CygLink has two data logging facilities: Quick Log for simple recording of thickness measurements and Structured mode with four templates available - Single Point, Multi Point, Grid Point and Key Point.
- The ROV Gauge sends thickness measurement data to the surface via an RS-422 serial link. Cygnus can supply the RS-422 umbilical cable up to 1,200 m (4,000 ft) in length. For longer distances, using a fibre optic multiplexer, the ROV gauge can output data in RS-232 mode.
- Fitted with a safety Pressure Relief Valve and Securing Eye.
- Easy calibration at the surface via CygLink software or Top Side Repeater (TSR) unit.
- Removable end plate for full serviceability with access to the Option Switches, Fuse and Status LED.
- Wet mateable 'MC' style underwater connectors
- RS-422 - RS-232 selectable.


Kit Contents

- Cygnus ROV Gauge
- Power and data cable connector
- Probe cable with marinised remote probe 5 m (16 ft)
- 'K3' RS-422 to RS-232 converter
- RS-232 to USB converter
- Cyglink data logging software
- Membrane couplant for the UT probe
- Spare membranes for the UT probe
- Membrane locking ring key
- Spare O-Rings for ROV
- 15 mm (1/2") test block
- Spare 1A fuses
- 3 mm (0.100") allen key
- Silicone grease
- *Optional Topside Repeater with video overlay facility kit.



Benefits of Cygnus Multiple Echo

- Measures remaining metal thickness on corroded and coated structures
- All measurements are error checked using 3 return echoes to give repeatable, reliable results
- Accepted by all major classification societies
- Greatly reduces inspection time and costs
- Echo strength indicator to aid measurement.

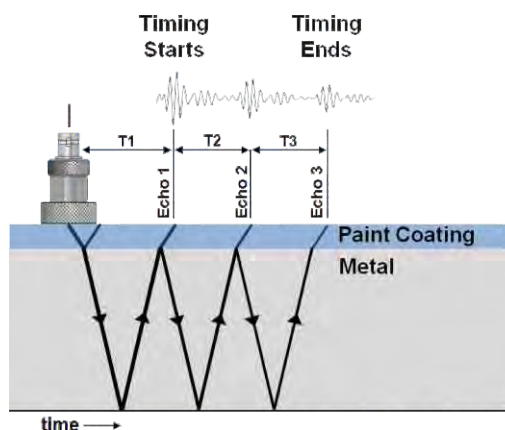


With multiple echo, readings are taken by measuring the time delay between any three consecutive backwall echos. The time of T1 (coating thickness) is ignored. The times of T2 and T3 are equal to the time that it takes to travel through the metal. Only by looking at three echos can the measurements be automatically verified (where $T2 = T3$).

M5-ROV-4K



M5-ROV-2K

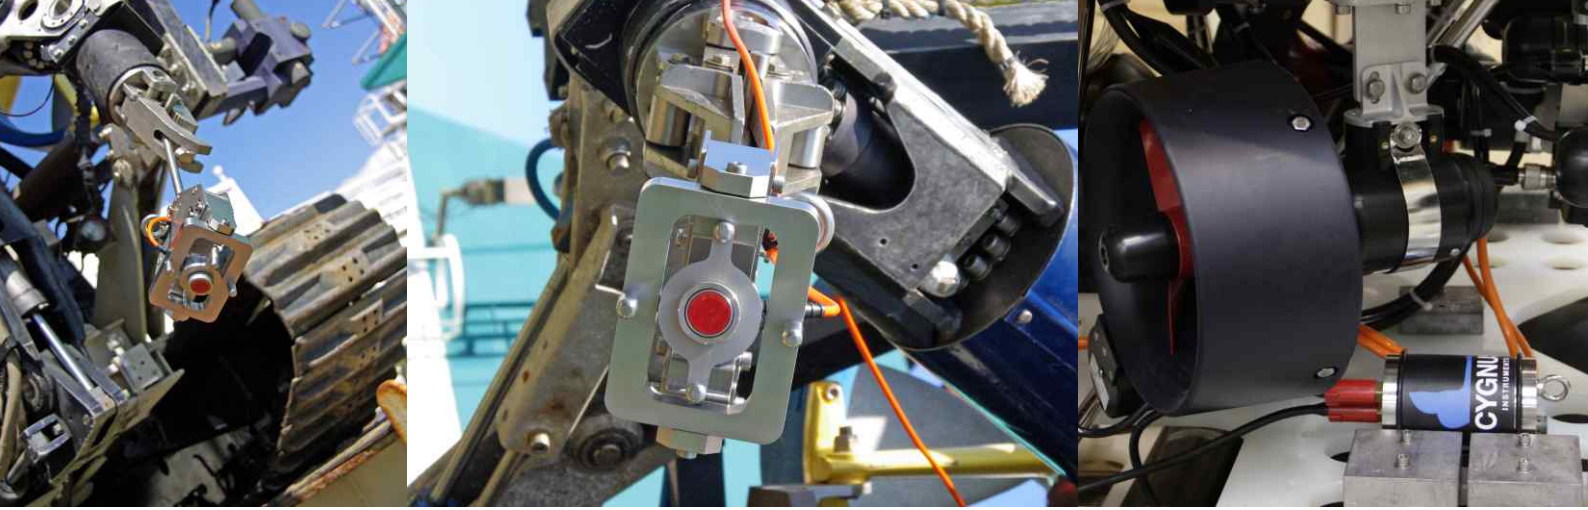

CygLink Software

CygLink is a Windows® application for PCs that allows remote viewing, control and data logging for the Cygnus ROV gauge. CygLink displays the thickness measurements in real-time and these can then be logged.



Settings within the gauge can be controlled remotely through CygLink, including calibrating the gauge to a known thickness and inputting a velocity of sound for the material being tested. There is also the option to choose the velocity from a list of common materials.

Each recorded measurement can have pre-set comments and/or a manually typed note added.



The data logged measurements can be recorded in a Linear List or a Two-Dimensional Grid. Each survey can have separate groups of measurements within it and a "Reference" and "Minimum" thickness set.

Reports can be created either as a .pdf or the data exported to a .csv file. The measurements can also be represented graphically.



Linear Chart

2D Surface Chart

3D Surface Chart

Top Side Repeater (TSR) - Optional

The Top Side Repeater is a small display unit that can be used to display the thickness measurements sent from the Cygnus ROV gauge to the surface.




Kit includes data and video cables.

TSR Video Overlay Facility

The Top Side Repeater can also superimpose the thickness measurements on to a composite PAL or NTSC video signal to display it on a monitor screen and/or the video recording of the survey. This provides a thickness measurement that can be linked to a position or place in the video recording.



Monitor & Video Recorder

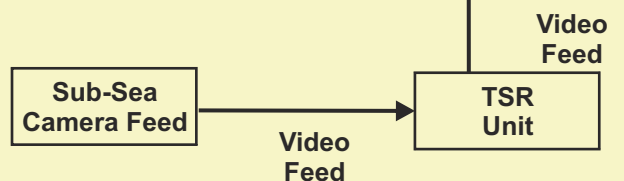

Specifications

| | |
|-----------------------------------|--|
| Materials | Sound velocities between 1000 m/s and 9995 m/s |
| Measurement Range in Steel | 3 mm - 250 mm (0.110" - 9.994") with 2.25 MHz probe 2 mm - 150 mm (0.065" - 6.000") with 3.5 MHz probe 1 mm - 50 mm (0.045" - 4.000") with 5.0 MHz probe |
| Accuracy | 0.1 mm (0.005") when calibrated in accordance with Cygnus Instruments Calibration Procedures |
| Resolution | 0.05 mm (0.002") |
| Probes | Single crystal soft-faced compression 13 mm (1/2") - 2.25, 3.5 or 5 MHz (Lower frequency probes offer better penetration on heavy corrosion/coatings) |
| Power | 7.0 - 30 V dc @ 150 mA (max) |
| Size | 88.90 mm (3.50") diameter x 205 mm (8.07") long (inc. fittings) |
| Weight | Model M5-ROV-2K = 0.975 kg (2.150 lbs) Model M5-ROV-4K = 4.100 kg (9.039 lbs) |
| Operating Temp. | -10°C to +50°C (14°F to 122°F) |
| Testing | Model M5-ROV-2K tested to 3 km (9.842 ft) depth Model M5-ROV-4K tested to 6 km (19,685 ft) depth |
| Communication | RS-422, Simplex Single Pair or RS-232 TXD 2400 or 9600 Baud (Selectable via DIP switches) |
| Compliance | CE, British Standard BS EN 15317:2013 (Specification for the characterisation and verification of ultrasonic thickness measuring equipment) |
| Environmental | RoHS, WEEE compliant |
| Warranty | 3 years on gauge, 6 months on probe |

*Specifications are subject to change for product improvement

Probe Handling Solutions

Complementing the Cygnus ROV Mountable thickness gauges, the Cygnus W1 Work Class ROV Probe Handler has been developed to offer an engineered probe-handling solution for Work Class ROV thickness gauging operations.

Details of this system and others can be found in separate brochures available on request or downloaded from our website.



Cygnus W1 Probe Handler



Russell Fraser Sales Pty Ltd

Unit 7/38 Waratah St
Kirrawee NSW 2232

Ph: (02) 9545 4433
Fax: (02) 9545 4218

Email: rfs@rfsales.com.au
Web: www.rfsales.com.au

ABN: 79 074 258 549



CB08UK ISS 4