



**ORIGINAL
Underwater
Gauge**

CYGNUS 1
UNDERWATER
IMMERSIBLE TO 300 METRES
PRESSURE MEMBRANE IS
ATTACHED TO TRANSDUCER
ALL 'O' RINGS MUST BE
FITTED AND CHANGED
AFTER EACH DIVE
CYGNUS INSTRUMENTS
BORCHESTER ENGLAND


Topside Repeater
Option A Option B



Cygnus Underwater

**DIVER-HELD MULTIPLE ECHO
ULTRASONIC DIGITAL THICKNESS GAUGE**

Measures metal thickness to determine wastage or corrosion accurately, quickly and without removing protective coatings

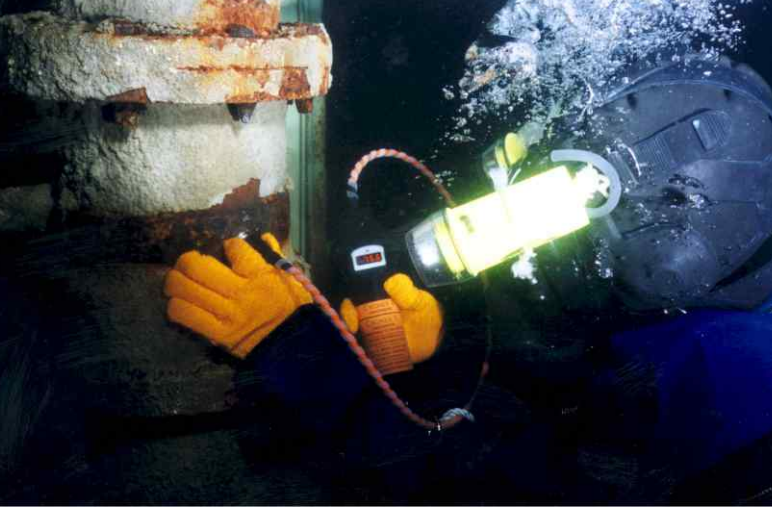


Features

- RINA approved (Certificate No. 2009DGPO787)
- Auto - Probe Recognition (APR)
- "Deep-Coat" mode for measuring through coatings up to 20 mm (3/4") thick
- Easy calibration using convenient buttons
- Rugged, durable, shock-proof construction
- Stable calibration - linear accuracy - no zero adjustment
- Large bright LED display for poor visibility
- Pressure rated to 300 m (1,000 ft) depth
- Heavy duty sealed unit with double 'O' ring protection
- Self verification of measurements to ensure accuracy
- Echo strength indicator to aid measurement
- All probes are protected by a membrane to prevent damage
- Various probe options
- Two rechargeable battery packs with charger
- Fixed head probe option for single handed use.

Benefits of Cygnus Multiple Echo

- Measures remaining metal thickness on corroded and coated structures
- All measurements are error checked using 3 return echoes to give repeatable, reliable results
- Accepted by all major classification societies
- Greatly reduces inspection time and costs
- Echo strength indicator to aid measurement.

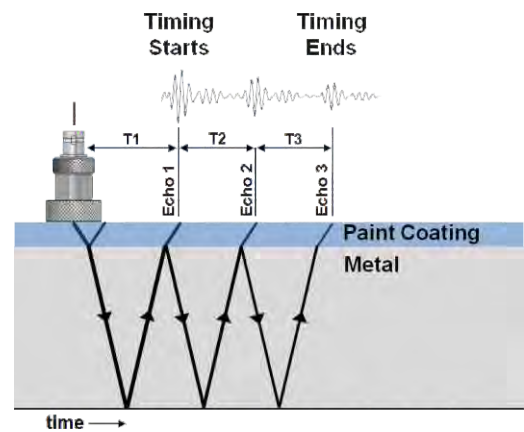

With multiple echo, readings are taken by measuring the time delay between any three consecutive backwall echos. The time of T1 (coating thickness) is ignored. The times of T2 and T3 are equal to the time that it takes to travel through the metal. Only by looking at three echos can the measurements be automatically verified (where $T2 = T3$).

Kit Contents

Instrument, heavy duty remote 2.25 MHz 13 mm (1/2") diameter probe, nose cone tommy bar, probe locking ring key, 2 rechargeable batteries and battery charger, spare membranes and 'O' rings, steel test block, lanyard, operation manual, pressure test and calibration certificates, Molykote grease and carry case.



RINA

Type Approved





Applications

Maintenance and safety checks of metal thickness for:

- Ships hulls
- Semi sub structures
- Anchor chains
- Subsea pipelines
- Offshore structures, jackets
- Storage vessels, FPSO's
- Dock gates, piers, jetties and pipings.

...plus many more.

Topside Repeater Options

The Topside Repeater is used when the readings need to be verified on the surface. Umbilical cable length is specified by the customer up to a maximum of 1,000 m (3,280 ft).

There are three options available:

Option A

Palm held surface display repeater with large liquid crystal display in an IP65 sealed case.


Option B

Data logging and remote display Windows based software. The umbilical is connected directly to the serial port of the PC.

Option C

Option A + B.

Option B

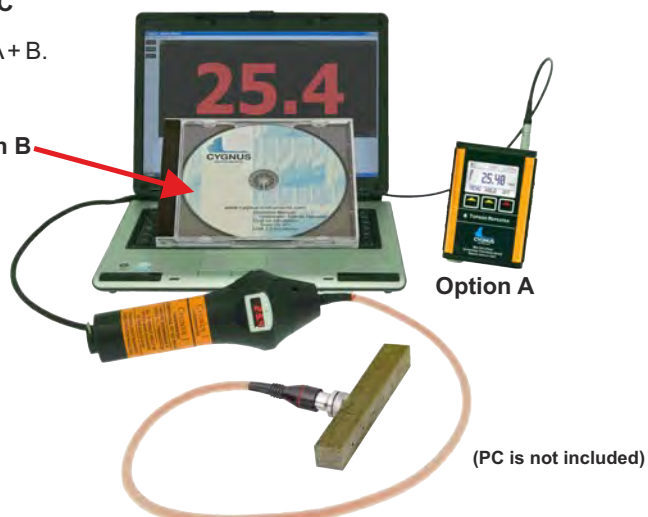

Option A

(PC is not included)

All Underwater Gauges with Topside Repeater Connectors can be upgraded to Option A, B or C. If you already have Option A or B, you can upgrade to Option C.

Specifications

Materials Sound velocities between 2000 m/s and 7000 m/s (0.059 and 0.31 in/microsec) - covers virtually all common engineering materials

Measurement Range in Steel 3 mm - 250 mm (0.110" - 9.995") with 2.25 MHz probe
2 mm - 150 mm (0.065" - 6.000") with 3.5 MHz probe
1 mm - 50 mm (0.045" - 4.000") with 5.0 MHz probe

Accuracy 0.1 mm (0.005") when calibrated in accordance with Cygnus Instruments Calibration Procedures

Resolution 0.1 mm or 0.05 mm (selectable) (0.005" or 0.002")

Probes Remote single crystal soft-faced compression
6 mm (1/4") - 5 MHz
13 mm (1/2") - 2.25, 3.5 or 5 MHz
19 mm (3/4") - 2.25 MHz
(Lower frequency probes offer better penetration on heavy corrosion/coatings)

Power NiMH rechargeable battery pack

Battery Life 30 hours' (continuous measuring)

Display Large, bright LED display

Size 235 mm x 75 mm (8 3/8" x 3")

Weight 950 g (2.1 lbs) - with remote probe
860 g (30.3 oz) - with fixed head probe

Operating Temp. -10°C to +50°C (14°F to 122°F)

Environmental Protection IPX8 continuous 300 m (984 ft) rating

Compliance CE, British Standard BS EN 15317:2013 (Specification for the characterisation and verification of ultrasonic thickness measuring equipment)

Environmental RoHS, WEEE compliant

Warranty 3 years on gauge, 6 months on probe

*Specifications are subject to change for product improvement

Cygnus Thickness Gauges



Intrinsically Safe



Hands Free



Data Logger



General Purpose



Heavy Duty



DIVE
(Underwater A-Scan)



Mini ROV Mountable



ROV Mountable



Russell Fraser Sales Pty Ltd

Unit 7/38 Waratah St
Kirrawee NSW 2232

Ph: (02) 9545 4433
Fax: (02) 9545 4218

Email: rfs@rfsales.com.au
Web: www.rfsales.com.au

ABN: 79 074 258 549



CB06UK ISS 4