



Mi-Glow®



Mi-Glow® 800

Physical Characteristics

Forest green powder, odorless.

Particle Certification

Particles meet or exceed all relevant industry specifications, including but not limited to ASTM E 1444, AMS 3044, MIL-STD-271, NAVSEA 250-1500-1 and NTR-1E. Certification is included with each shipment.

Particle Color

Fluorescent Yellow-Green


Average Particle Size

3 µm

d(0.1): 2.278 µm

d(0.5): 3.438 µm

d(0.9): 5.133 µm

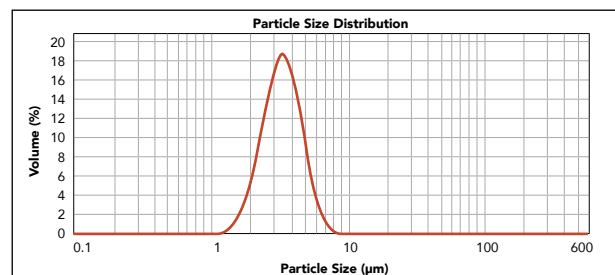

Specific Surface Area: 1.84 m²/g

AMS Standard

3044

SAE Sensitivity*

8

[*Representative of the number of lines shown on a tool steel ring as defined in SAE AS5282.]

Temperature Range

32-120°F (0-49°C)

Related Product Information:

Safety Data Sheet

Technical Bulletin 240

Item

FG-3100

FG-3102

Package Size

1 pound/jar

12 pounds/pail

Mi-Glow® 800 is fluorescent yellow-green particles used with CircleSol M™, a refined petroleum distillate. It is designed to be used with UV-A light to detect fine discontinuities, such as those associated with the steel rolling, forming, machining, welding and heat treatment processes. The sizing of the Mi-Glow® 800 particle typically ranges from 1 to 5 µm, with an average of 3 µm. It meets or exceeds AMS 3044 and all applicable industry specifications. Mi-Glow® 800 particles improve accuracy and visual clarity in presenting critical discontinuities to the human eye.



Russell Fraser Sales Pty Ltd

Unit 10 / 1-11 Burns Road, Heathcote NSW 2233 Australia

Ph: +61 2 9545 4433 Email: rfs@rfsales.com.au Website: rfsales.com.au