



# Mi-Glow®



## Mi-Glow® 800

### Physical Characteristics

Forest green powder, odorless.

### Particle Certification

Particles meet or exceed all relevant industry specifications, including but not limited to ASTM E 1444, AMS 3044, MIL-STD-271, NAVSEA 250-1500-1 and NTR-1E. Certification is included with each shipment.

### Particle Color

Fluorescent Yellow-Green


### Average Particle Size

3 µm

d(0.1): 2.278 µm

d(0.5): 3.438 µm

d(0.9): 5.133 µm

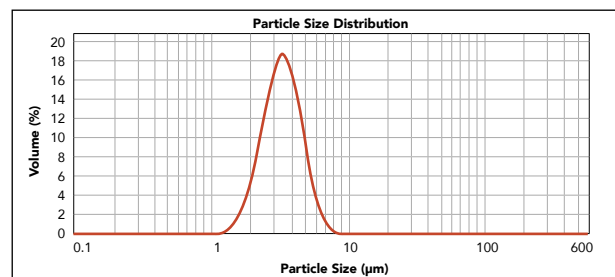

Specific Surface Area: 1.84 m<sup>2</sup>/g

### AMS Standard

3044

### SAE Sensitivity\*

8

[\*Representative of the number of lines shown on a tool steel ring as defined in SAE AS5282.]

### Temperature Range

32-120°F (0-49°C)

### Related Product Information:

Safety Data Sheet  
Technical Bulletin 240

### Item #

FG-3108  
FG-3104

### Package Size

500 gr/jar  
10 kg/pail

Mi-Glow® 800 is fluorescent yellow-green particles used with CircleSol M™, a refined petroleum distillate. It is designed to be used with UV-A light to detect fine discontinuities, such as those associated with the steel rolling, forming, machining, welding and heat treatment processes. The sizing of the Mi-Glow® 800 particle typically ranges from 1 to 5 µm, with an average of 3 µm. It meets or exceeds AMS 3044 and all applicable industry specifications. Mi-Glow® 800 particles improve accuracy and visual clarity in presenting critical discontinuities to the human eye.



## Circle Systems, Inc.

rev 10/19



## Russell Fraser Sales Pty Ltd

Unit 7/38 Waratah St  
Kirrawee NSW 2232

Ph: (02) 9545 4433  
Email: rfs@rfsales.com.au

Web: www.rfsales.com.au

ABN: 79 074 250 549