

CLASSIC SERIES

LED INSPECTION LAMP

CLA-100Z

▶ Nominal steady-state UV-A (365 nm) intensity of **5,700 $\mu\text{W}/\text{cm}^2$** at 15 in (38 cm)

▶ Low visible light emission—less than 0.5 foot-candle (2.2 lux)



Dust Tight & Water Resistant



Fanless & Cool Running



Lightweight & Rugged



Instant-On Operation

ROCKER SWITCH

Easy on/off operation with rear Rocker switch

RUBBER BUMPER

Protects LED's from damage



LONG-LASTING UV-A LENSES

Equipped with UV-A Pass Filter

PISTOL GRIP

Comfortable, balanced control

ANODIZED ALUMINUM HOUSING

Minimizes corrosion and stands up to years of heavy use

CLASSIC SERIES CLA-100Z

MODEL	NOMINAL STEADY-STATE UV-A INTENSITY at 15 in (38 cm) ①	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 $\mu\text{W}/\text{cm}^2$	VISIBLE LIGHT MEASUREMENT
CLA-100Z	5,700 $\mu\text{W}/\text{cm}^2$	6 in (15.25 cm)	>350 foot-candle

① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.

Light Source:	2 UV-A LED'S & 1 White LED
Lamp Style:	Cordless lamp
Lamphead Diameter:	4.4 in (11.18 cm)
Length:	6.7 in (17 cm)
Width:	3.4 in (8.6 cm)
Height:	7.45 in (18.9 cm)
Weight:	2.05 Lb (930 g) (with internal battery)
Power Requirements:	90 - 270 VAC, 50 TO 60 Hz
Run Time:	7 to 8 hours (continuous)
Charge Time:	2 hours

CLA-100Z



Classic Series Dual Function LED Inspection Lamp Kit

Comes complete with Classic Series Dual Function LED Inspection Lamp with lanyard, Smart Charger Power Supply, AC Cord set, UV Absorbing Spectacles, Carrying Case For Spectacles, Protective Carrying Case.




UV-A Beam Profiles

Surface Contour Profile at 15 in (38 cm)

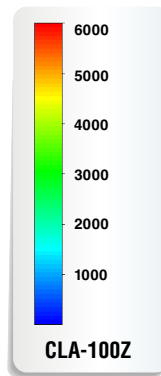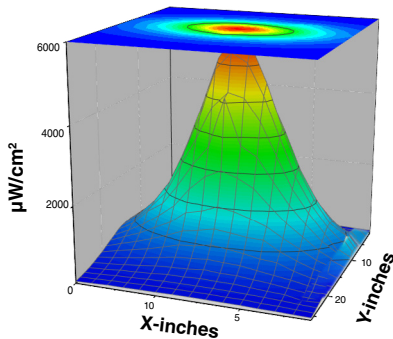

Top Intensity Profile at 15 in (38 cm)

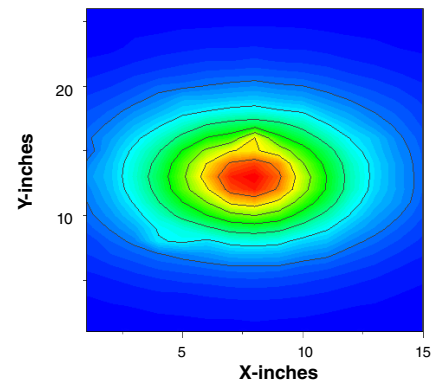

SPECTRO-UV
www.Spectro-UV.com
 4 Dubon Ct., Farmingdale, NY 11735
 866-230-7305

DISTRIBUTED BY:



Russell Fraser Sales Pty Ltd
 Ph: (02) 9545 4433
rfs@rfsales.com.au
www.rfsales.com.au
 Unit 7 / 38 Waratah St
 Kirrawee NSW 2232

NDT
 5/22 A5202022
 PRINTED IN USA